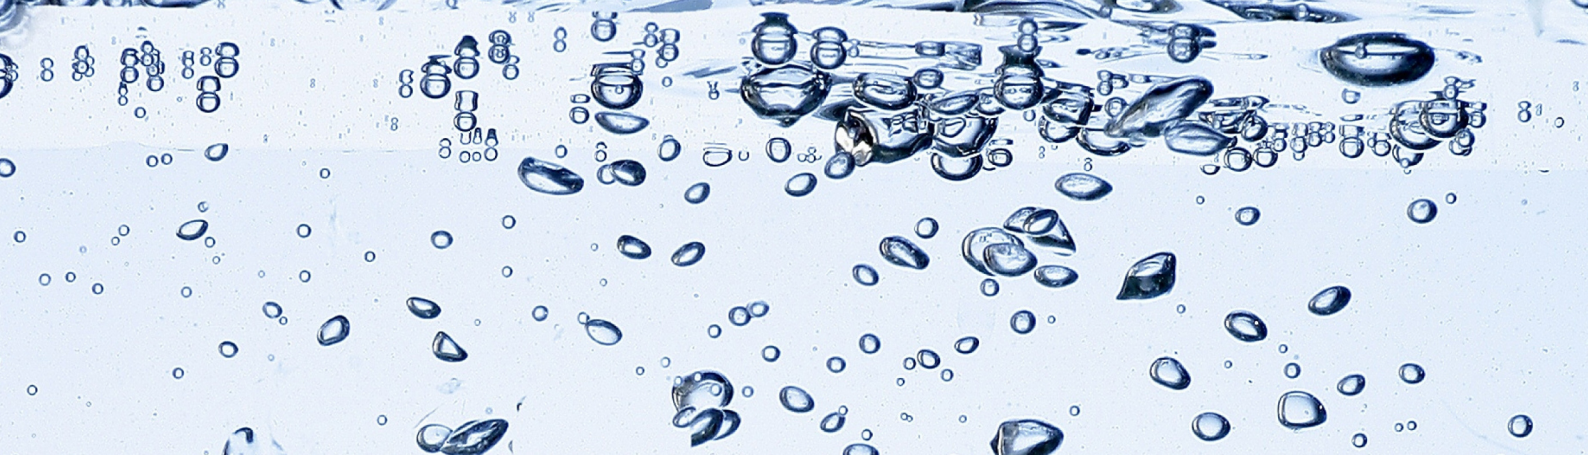

D3 Unit

D3 Descaling unit

- PVC manifolds and supplied plumbing kit speed and simplify mold hook-up
- High-flow CVP plastic pump with thermally protected continous duty motor
- Plastic frame, tank, pump fittings and hardware ensure corrosion resistance and long life
- 4 circuit manifolds standard
- Adapter kits available for all applications

REGLOPLAS

D3 Unit

09-12-2015

Technical data		
Outlet temperature		
Outlet temperature max.	°C	60
Heat transfer fluid		
Filling quantity	l	19
Filling quantity	l	41.7
Pump capacity		
Flow rate max.	l/min	68.1
Pressure max.	bar	0.2068
Power consumption		
Heating capacity at 230V	kW	0
Power consumption	kW	0.15
Operating voltage		
Operating voltage	V/Hz	115/AC
Connections		
Outlet/inlet		NPT 1/2"
Dimensions		
Width	mm	457
Height	mm	863
Depth	mm	584
Colour		
Colour		white

Equipment	
PVC Manifolds and Plumping Kit	●
Water circuit of non-rusting materials	●
Vinyl hose (1/2", 50 ft)	○
Additional accessories and other options available	○

● Standard ○ Option – Not available ● / ○ / – Device-related